



New design Green Pin® Master Links

The Green Pin® master links have been revised. In this table you can consult the new dimensions.

The new design is wider than before which results in a better fit with crane hooks.

The Green Pin® Master Link is a grade 10 single master link. This welded single master link is designed for a 1 or 2 leg sling. The flat on the eye enables the assembly with an omega link or on a thimble. The Green Pin® Master Link is available in a range with a working load limit from 2 t. up to 27.6 t.

For more information please contact us: sales@vanbeest.eu

greenpin.com

A VAN BEEST BRAND

Product update

April 2021


Green Pin® Master Link

Product code: UMS
Material: grade 10, alloy steel
Safety Factor: MBL equals 4 x WLL
Finish: painted blue
Temperature range: -40°C up to +200°C (-40°F up to +392°F)

Certification: **2.1** **2.2** **3.1** **MTC^b**

partnumber	diameter	diameter chain 1 leg	diameter chain 2 legs		working load limit	length inside	width inside	thickness	weight each
	a mm	mm	$\beta \leq 45^\circ$ mm	$\beta \leq 60^\circ$ mm	t	b mm	c mm	d mm	kg
GPUMS13	13	6	6	6	2	115	60	7	0.4
GPUMS16	16	8	-	8	3.2	120	70	7	0.6
GPUMS18	18	10	8	10	5.4	135	75	9	0.84
GPUMS22	22	13	10	13	8.2	170	90	11	1.6
GPUMS25	25	16	13	16	11.2	190	103	13	2.17
GPUMS30	30	20	16	20	16	235	125	17	4
GPUMS38	38	22	20-22	22	27.6	250	150	21	7.1

partnumber	diameter	diameter chain 1 leg	diameter chain 2 legs			working load limit	length inside	width inside	thickness	weight each
	a inch	inch	$\beta \leq 30^\circ$ inch	$\beta \leq 45^\circ$ inch	$\beta \leq 60^\circ$ inch	t	b inch	c inch	d inch	lbs
GPUMS13	1/2	7/32	-	7/32	7/32	2	4 17/32	2 3/8	9/32	0.88
GPUMS16	5/8	9/32 - 5/16	7/32	-	9/32 - 5/16	3.2	4 23/32	2 3/4	9/32	1.32
GPUMS18	23/32	3/8	9/32 - 5/16	9/32 - 5/16	3/8	5.4	5 5/16	2 15/16	11/32	1.85
GPUMS22	7/8	1/2	3/8	3/8	1/2	8.2	6 11/16	3 17/32	1/2	3.53
GPUMS25	31/32	5/8	-	1/2	5/8	11.2	7 15/32	4 1/16	1/2	4.79
GPUMS30	1 3/16	3/4	-	3/4	3/4	16	9 1/4	4 29/32	21/32	8.82
GPUMS38	1 1/2	7/8	3/4	3/4 - 7/8	7/8	27.6	9 27/32	5 29/32	13/16	15.7

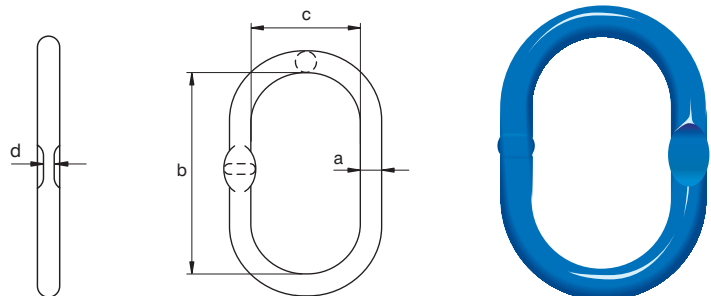



New design Green Pin® Master Links

The Green Pin® master links have been revised. In this table you can consult the new dimensions.

The new design is wider than before which results in a better fit with crane hooks.

The Green Pin® Master Link Assembly is a grade 10 master link assembly. This welded master link assembly is designed for 3 or 4 leg sling. The flat on the eye enables the assembly with an omega link or on a thimble. The Green Pin® Master Link Assembly is available in a range with a working load limit from 2.5 t. up to 41.6 t.

For more information please contact us: sales@vanbeest.eu

greenpin.com

A VAN BEEST BRAND

Product update

April 2021

Green Pin® Master Link Assembly

Product code: UMTS
Material: grade 10, alloy steel
Safety Factor: MBL equals 4 x WLL
Finish: painted white
Temperature range: -40°C up to +200°C (-40°F up to +392°F)

Certification: **2.1** **2.2** **3.1** **MTC^b**

part number	diameter	diameter chain 3/4 legs		working load limit	length inside	width inside	diameter	length inside	width inside	thickness	weight each
	a mm	$\beta \leq 45^\circ$ mm	$\beta \leq 60^\circ$ mm								
GPUMTS18	18	6	6	3.65	135	75	16	120	70	7	3.1
GPUMTS22	22	8	8-10	6.8	170	90	18	135	75	9	3.3
GPUMTS28	28	10	13	11	209	120	20	150	80	11	5.4
GPUMTS36	36	13	16	17.7	270	145	25	190	103	13	11.2
GPUMTS38	38	16	18-19	21.2	250	150	30	235	125	17	15.1
GPUMTS50	50	20	22	41.6	380	200	38	250	150	21	32.2

part number	diameter	diameter chain 3/4 legs			working load limit	length inside	width inside	diameter	length inside	width inside	thickness	weight each
	a inch	$\beta \leq 30^\circ$ inch	$\beta \leq 45^\circ$ inch	$\beta \leq 60^\circ$ inch								
GPUMTS18	23/32	-	7/32	7/32	3.65	5 5/16	2 15/16	5/8	4 23/32	2 3/4	9/32	6.8
GPUMTS22	7/8	9/32 - 5/16	9/32 - 5/16	9/32 - 3/8	6.8	6 11/16	3 17/32	23/32	5 5/16	2 15/16	11/32	7.3
GPUMTS28	1 3/32	3/8	3/8	1/2	11	8 7/32	4 23/32	25/32	5 29/32	3 7/32	7/16	11.9
GPUMTS36	1 13/32	1/2	1/2	5/8	17.7	10 5/8	5 23/32	31/32	7 15/32	4 1/16	1/2	24.7
GPUMTS38	1 1/2	-	5/8	3/4	21.2	9 27/32	5 29/32	1 3/16	9 1/4	4 29/32	21/32	33.3
GPUMTS50	1 31/32	3/4	3/4	7/8	41.6	14 31/32	7 7/8	1 1/2	9 27/32	5 29/32	13/16	71.0

