



New: Green Pin® Wider Single Master Links

The Green Pin® Wider Single Master Link is a grade 10 single master link with larger inside dimensions. This welded single master link is designed for 1 or 2 leg slings. This range is complementary to the existing range UMS and UMTS.

The extended width enables you to connect the link to a connection point, which is wider than usual or to fit in a large crane hook. A flat part on the link enables assembly with an omega link or with a thimble. The Green Pin® Wider Master Link is available in a range with a working load limit from 4.1 t. up to 64 t.

For more information please contact us: info@greenpin.com

greenpin.com

A VAN BEEST BRAND

Product update

November 2021

Green Pin® Wider Master Link GR10


Product code: UMSW
Material: alloy steel, grade 10, quenched and tempered
Safety Factor: MBL equals 5 x WLL
Standard: ASTM 952 and follows the EN1677-4 with values for grade 100
Finish: painted blue
Temperature range: -40°C up to +200°C (-40°F up to +392°F)

Certification:

2.1 **2.2** **3.1** **MTC^b** **MPI^a**

partnumber	diameter	diameter chain 1 leg	diameter chain 2 legs		working load limit	length inside	width inside	thickness	weight each
	a mm	mm	β ≤ 45° mm	β ≤ 60° mm	t	b mm	c mm	d mm	kg
GPUMSW17	17	8 - 10	8	8 - 10	4.1	160	90	7	0.85
GPUMSW19	19	10	8-10	10	6.7	160	90	9	1.08
GPUMSW25	25	13 - 16	13	13 - 16	11.5	210	115	13	2.43
GPUMSW33	33	20	16	16 - 20	17	270	140	17	5.4
GPUMSW38	38	22	20-22	20 - 22	27.7	275	150	21	7.5
GPUMSW50	50	-	-	-	45	380	200	50	17.7
GPUMSW56	56	-	-	-	64	400	200	56	23.5

partnumber	diameter	diameter chain 1 leg	diameter chain 2 legs			working load limit	length inside	width inside	thickness	weight each
	a inch	inch	β ≤ 30° inch	β ≤ 45° inch	β ≤ 60° inch	t	b inch	c inch	d inch	lbs
GPUMSW17	2 ¹ / ₂	5 ¹ / ₁₆ - 3 ⁷ / ₈	9 ³ / ₃₂	9 ³ / ₃₂ - 5 ¹ / ₁₆	9 ³ / ₃₂ - 5 ¹ / ₁₆ - 3 ⁷ / ₈	4.1	6 5 ¹ / ₁₆	3 1 ⁷ / ₃₂	9 ³ / ₃₂	1.87
GPUMSW19	3 ³ / ₄	3 ³ / ₈	9 ³ / ₃₂ - 5 ¹ / ₁₆	9 ³ / ₃₂ - 5 ¹ / ₁₆ - 3 ⁷ / ₈	3 ³ / ₈	6.7	6 5 ¹ / ₁₆	3 1 ⁷ / ₃₂	1 ¹ / ₃₂	2.38
GPUMSW25	3 ¹ / ₂	1 ¹ / ₂ - 5 ⁷ / ₈	-	1 ¹ / ₂	1 ¹ / ₂ - 5 ⁷ / ₈	11.5	8 9 ³ / ₃₂	4 1 ⁷ / ₃₂	1 ¹ / ₂	5.36
GPUMSW33	1 5 ¹ / ₁₆	3 ³ / ₄	-	5 ⁷ / ₈	5 ⁷ / ₈ - 3 ³ / ₄	17	10 5 ⁷ / ₈	5 1 ¹ / ₂	2 ¹ / ₃₂	11.9
GPUMSW38	1 1 ¹ / ₂	7 ⁷ / ₈	3 ³ / ₄	3 ³ / ₄ - 7 ⁷ / ₈	3 ³ / ₄ - 7 ⁷ / ₈	27.7	10 1 ³ / ₁₆	5 2 ⁹ / ₃₂	1 ³ / ₁₆	16.5
GPUMSW50	1 3 ¹ / ₃₂	-	-	-	-	45	14 3 ¹ / ₃₂	7 7 ⁷ / ₈	1 3 ¹ / ₃₂	38.9
GPUMSW56	2 7 ³ / ₃₂	-	-	-	-	64	15 3 ¹ / ₄	7 7 ⁷ / ₈	2 7 ³ / ₃₂	51.8

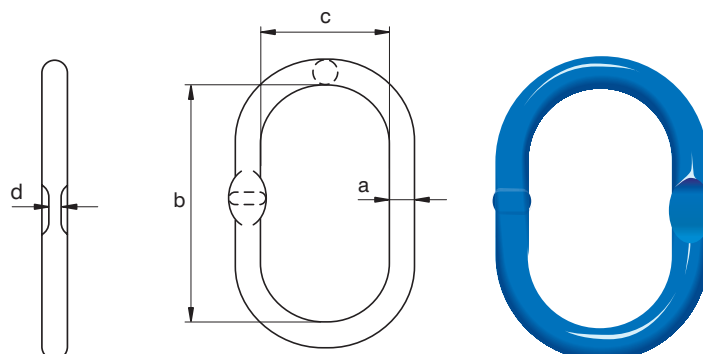

greenpin.com

A VAN BEEST BRAND



New: Green Pin® Wider Master Link Assembly

The Green Pin® Wider Master Link Assembly is a grade 10 master link assembly with larger inside dimensions. This welded master link assembly is designed for 3 or 4 leg slings. This range is complementary to the existing range UMS and UMTS.

The extended width of the main link enables you to connect the link to a connection point, which is wider than usual or to fit in a large crane hook. A flat part on the link enables assembly with an omega link or with a thimble. The Green Pin® Wider Master Link Assembly is available in a range with a working load limit from 4.3 t. up to 75 t.

For more information please contact us: info@greenpin.com

greenpin.com

A VAN BEEST BRAND

Product update

November 2021

Green Pin® Wider Master Link Assembly GR10

Product code: UMTSW
Material: alloy steel, grade 10, quenched and tempered
Safety Factor: MBL equals 5 x WLL
Standard: ASTM 952 and follows the EN1677-4 with values for grade 100
Finish: painted blue
Temperature range: -40°C up to +200°C (-40°F up to +392°F)

Certification:

2.1 **2.2** **3.1** **MTC^b** **MPI^a**

part number	diameter		diameter chain 3/4 legs		working load limit	length inside	width inside	diameter	length inside	width inside	thickness	weight each
	a mm	β ≤ 45° mm	β ≤ 60° mm	t	b mm	c mm	d mm	e mm	f mm	g mm	kg	
GPUMTSW19	19	-	8	4.3	160	90	14	120	70	9	1.96	
GPUMTSW23	23	8	8 - 10	6.7	180	100	17	160	90	9	3.5	
GPUMTSW40	40	16	16 - 20	28.1	300	160	33	270	140	17	19.8	
GPUMTSW45	45	20	20 - 22	38.3	340	180	38	275	150	21	27.8	
GPUMTSW60	60	-	-	75	400	200	50	380	200	50	62.5	

part number	diameter		diameter chain 3/4 legs			working load limit	length inside	width inside	diameter	length inside	width inside	thickness	weight each
	a inch	β ≤ 30° inch	β ≤ 45° inch	β ≤ 60° inch	t	b inch	c inch	d inch	e inch	f inch	g inch	lbs	
GPUMTSW19	3/4	-	9/32	9/32 - 5/16	4.3	6 1/16	3 17/32	9/16	4 23/32	2 3/4	1 1/32	4.32	
GPUMTSW23	29/32	-	9/32 - 5/16	9/32 - 5/16 - 3/8	6.7	7 3/32	3 15/16	2 1/32	6 5/16	3 17/32	1 1/32	7.72	
GPUMTSW40	1 9/16	5/8	5/8	5/8 - 3/4	28.1	11 13/16	6 5/16	1 5/16	10 5/8	5 1/2	2 1/32	43.7	
GPUMTSW45	1 25/32	-	3/4	3/4 - 7/8	38.3	13 3/8	7 3/32	1 1/2	10 13/16	5 29/32	1 3/16	61.3	
GPUMTSW60	2 3/8	-	-	-	75	15 3/4	7 7/8	1 31/32	14 31/32	7 7/8	1 31/32	138	

