



## DNV MASTER LINK, IDEAL FOR OFFSHORE USE

The Green Pin® DNV Master Link is perfect for offshore use. The Master Link is DNV-certified and has a large opening to accommodate larger lifting points and crane hooks. Moreover, the coating of the DNV Master Link ensures long-term durability, even under severe environmental conditions. The DNV Master Link is available in a range with a working load limit from 4.1 up to 100 ton.

For more information please contact us: [info@greenpin.com](mailto:info@greenpin.com)

[greenpin.com](http://greenpin.com)

A VAN BEEST BRAND

## Product update

June 2022

### Green Pin® DNV Master Link


**Product code:** P-6810  
**Material:** alloy steel, Grade 8  
**Safety Factor:** MBL equals 5 x WLL  
**Standard:** DNV 2.7-1, EN 12079-2 and EN 1677-4  
**Finish:** painted silver  
**Temperature range:** -40°C up to +200°C (-40°F up to +392°F)


**Certification:** **2.1** **2.2** **3.1** **MTC<sup>b</sup>** **MPI<sup>b</sup>** **DNV 2.7-1<sup>a</sup>**

**Note:** GPMLDNV65 & GPMLDNV75:  
 temperature range: -20°C up to +200°C

partnumber	working load limit	diameter	length inside	width inside	weight each
	<b>t</b>	<b>a mm</b>	<b>b mm</b>	<b>c mm</b>	<b>kg</b>
GPMLDNV16	4.1	16	150	75	0.68
GPMLDNV22	7	22	270	140	2.28
GPMLDNV26	9.3	26	270	140	3.11
GPMLDNV28	14.5	28	270	140	3.78
GPMLDNV28S	19.5	28	200	110	3
GPMLDNV32	19	32	270	140	5.02
GPMLDNV36	26	36	270	140	6.46
GPMLDNV40	30.5	40	280	155	8.46
GPMLDNV45	40	45	320	175	12.2
GPMLDNV50	51	50	350	195	16.5
GPMLDNV65	75	65	410	220	33
GPMLDNV75	100	75	450	250	49

partnumber	working load limit	diameter	length inside	width inside	weight each
	<b>t</b>	<b>a inch</b>	<b>b inch</b>	<b>c inch</b>	<b>lbs</b>
GPMLDNV16	4.1	5/8	5 29/32	2 15/16	1.5
GPMLDNV22	7	7/8	10 5/8	5 1/2	5.03
GPMLDNV26	9.3	1	10 5/8	5 1/2	6.86
GPMLDNV28	14.5	1 1/8	10 5/8	5 1/2	8.34
GPMLDNV28S	19.5	1 1/8	7 7/8	4 11/32	6.62
GPMLDNV32	19	1 1/4	10 5/8	5 1/2	11.1
GPMLDNV36	26	1 3/8	10 5/8	5 1/2	14.2
GPMLDNV40	30.5	1 9/16	11 1/32	6 3/32	18.7
GPMLDNV45	40	1 3/4	12 19/32	6 7/8	26.9
GPMLDNV50	51	2	13 25/32	7 11/16	36.5
GPMLDNV65	75	2 9/16	16 5/32	8 21/32	72.8
GPMLDNV75	100	3	17 23/32	9 27/32	108

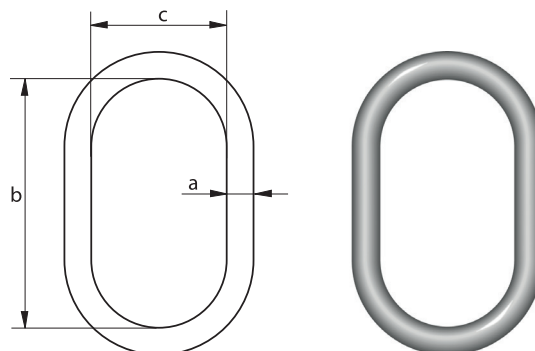



## DNV MASTER LINK ASSEMBLY, IDEAL FOR OFFSHORE USE

The Green Pin® DNV Master Link Assembly is perfect for offshore use. The Master Link Assembly is DNV-certified and has a large opening to accommodate larger lifting points and crane hooks. Moreover, the coating of the DNV Master Link Assembly ensures long-term durability, even under severe environmental conditions. The DNV Master Link Assembly is available in a range with a working load limit from 4.1 up to 100 ton.

For more information please contact us: [info@greenpin.com](mailto:info@greenpin.com)

[greenpin.com](http://greenpin.com)

A VAN BEEST BRAND

## Product update

June 2022

### Green Pin® DNV Master Link Assembly

**Product code:** P-6820  
**Material:** alloy steel, Grade 8  
**Safety Factor:** MBL equals 5 x WLL  
**Standard:** DNV 2.7-1, EN 12079-2 and EN 1677-4  
**Finish:** painted silver  
**Temperature range:** -40°C up to +200°C (-40°F up to +392°F)

**Certification:** **2.1** **2.2** **3.1** **MTC<sup>b</sup>** **MPI<sup>b</sup>** **DNV 2.7-1<sup>a</sup>**

**Note:** GPMLADNV65 & GPMLADNV75:  
 temperature range: -20°C up to +200°C

part number	working load limit	diameter	length inside	width inside	diameter	length inside	width inside	weight each
	t	a mm	b mm	c mm	d mm	e mm	f mm	kg
GPMLADNV16	4.1	16	150	75	14.5	125	60	1.62
GPMLADNV22	7	22	270	140	22	162	90	5.22
GPMLADNV26	9.3	26	270	140	22	162	90	6.05
GPMLADNV28	14.5	28	270	140	22	162	90	6.73
GPMLADNV32	19	32	270	140	28	200	110	10.9
GPMLADNV36	26	36	270	140	28	200	110	12.4
GPMLADNV40	30.5	40	280	155	32	270	140	18.5
GPMLADNV45	40	45	320	175	36	270	140	25.1
GPMLADNV50	51	50	350	195	45	320	175	40.9
GPMLADNV65	75	65	410	220	50	350	195	66.1
GPMLADNV75	100	75	450	250	65	410	220	115

part number	working load limit	diameter	length inside	width inside	diameter	length inside	width inside	weight each
	t	a inch	b inch	c inch	d inch	e inch	f inch	lbs
GPMLADNV16	4.1	5/8	5 29/32	2 19/16	9/16	4 29/32	2 3/8	3.57
GPMLADNV22	7	7/8	10 5/8	5 1/2	7/8	6 3/8	3 17/32	11.5
GPMLADNV26	9.3	1	10 5/8	5 1/2	7/8	6 3/8	3 17/32	13.3
GPMLADNV28	14.5	1 1/8	10 5/8	5 1/2	7/8	6 3/8	3 17/32	14.8
GPMLADNV32	19	1 1/4	10 5/8	5 1/2	1 3/32	7 7/8	4 11/32	24.1
GPMLADNV36	26	1 3/8	10 5/8	5 1/2	1 3/32	7 7/8	4 11/32	27.2
GPMLADNV40	30.5	1 9/16	11 1/32	6 3/32	1 1/4	10 5/8	5 1/2	40.8
GPMLADNV45	40	1 3/4	12 19/32	6 7/8	1 13/32	10 5/8	5 1/2	55.3
GPMLADNV50	51	2	13 25/32	7 11/16	1 25/32	12 19/32	6 7/8	90.2
GPMLADNV65	75	2 9/16	16 9/32	8 21/32	2	13 29/32	7 11/16	146
GPMLADNV75	100	3	17 23/32	9 27/32	2 9/16	16 5/32	8 21/32	254

